


## Solar pressurized water tank

Volume	Insulating Layer	Outer Shell of Tank	Inner Shell of Tank	Tank Size	
100L	Foaming polyurethane, Thickness: 50mm	Color Steel Plate(Enamel white) $\Phi$ 470mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 370mm, Thickness: 1.0mm	$\Phi$ 470mm * 1060mm(Length)	
150L	Foaming polyurethane, Thickness: 50mm	Color Steel Plate(Enamel white) $\Phi$ 470mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 370mm, Thickness: 1.2mm	$\Phi$ 470mm * 1450mm(Length)	
200L	Foaming polyurethane, Thickness: 50mm	Color Steel Plate(Enamel white) $\Phi$ 550mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 450mm, Thickness: 1.5mm	$\Phi$ 550mm * 1340mm(Length)	
250L	Foaming polyurethane, Thickness: 50mm	Color Steel Plate(Enamel white) $\Phi$ 580mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 480mm, Thickness: 1.5mm	$\Phi$ 580mm * 1450mm(Length)	
300L	Foaming polyurethane, Thickness: 50mm	Color Steel Plate(Enamel white) $\Phi$ 580mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 480mm, Thickness: 1.5mm	$\Phi$ 580mm * 1700mm(Length)	
400L	Foaming polyurethane, Thickness: 60mm	Color Steel Plate(Enamel white) $\Phi$ 680mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 580mm, Thickness: 2.0mm	$\Phi$ 680mm * 1560mm(Length)	
500L	Foaming polyurethane, Thickness: 60mm	Color Steel Plate(Enamel white) $\Phi$ 680mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 580mm, Thickness: 2.0mm	$\Phi$ 680mm * 1890mm(Length)	
500L	Foaming polyurethane, Thickness: 60mm	Color Steel Plate(Enamel white) $\Phi$ 700mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 580mm, Thickness: 2.0mm	$\Phi$ 700mm * 1890mm(Length)	
600L	Foaming polyurethane, Thickness: 60mm	Color Steel Plate(Enamel white) $\Phi$ 700mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 580mm, Thickness: 2.0mm	$\Phi$ 700mm * 2176mm(Length)	
700L	Foaming polyurethane, Thickness: 100mm	Color Steel Plate(Enamel white) $\Phi$ 800mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 1000mm, Thickness: 2.5mm	$\Phi$ 1000mm * 1640mm(Length)	
800L	Foaming polyurethane, Thickness: 100mm	Color Steel Plate(Enamel white) $\Phi$ 800mm, Thickness: 0.5mm	Stainless steel 304-2B $\Phi$ 1000mm, Thickness: 2.5mm	$\Phi$ 1000mm * 1860mm(Length)	

1000L	Foaming polyurethane, Thickness: 100mm	Color Steel Plate(Enamel white) Φ800mm, Thickness: 0.5mm	Stainless steel 304-2B Φ480mm, Thickness: 2.5mm	Φ1000mm * 2100mm(Length)	
-------	--	--	---	--------------------------	--

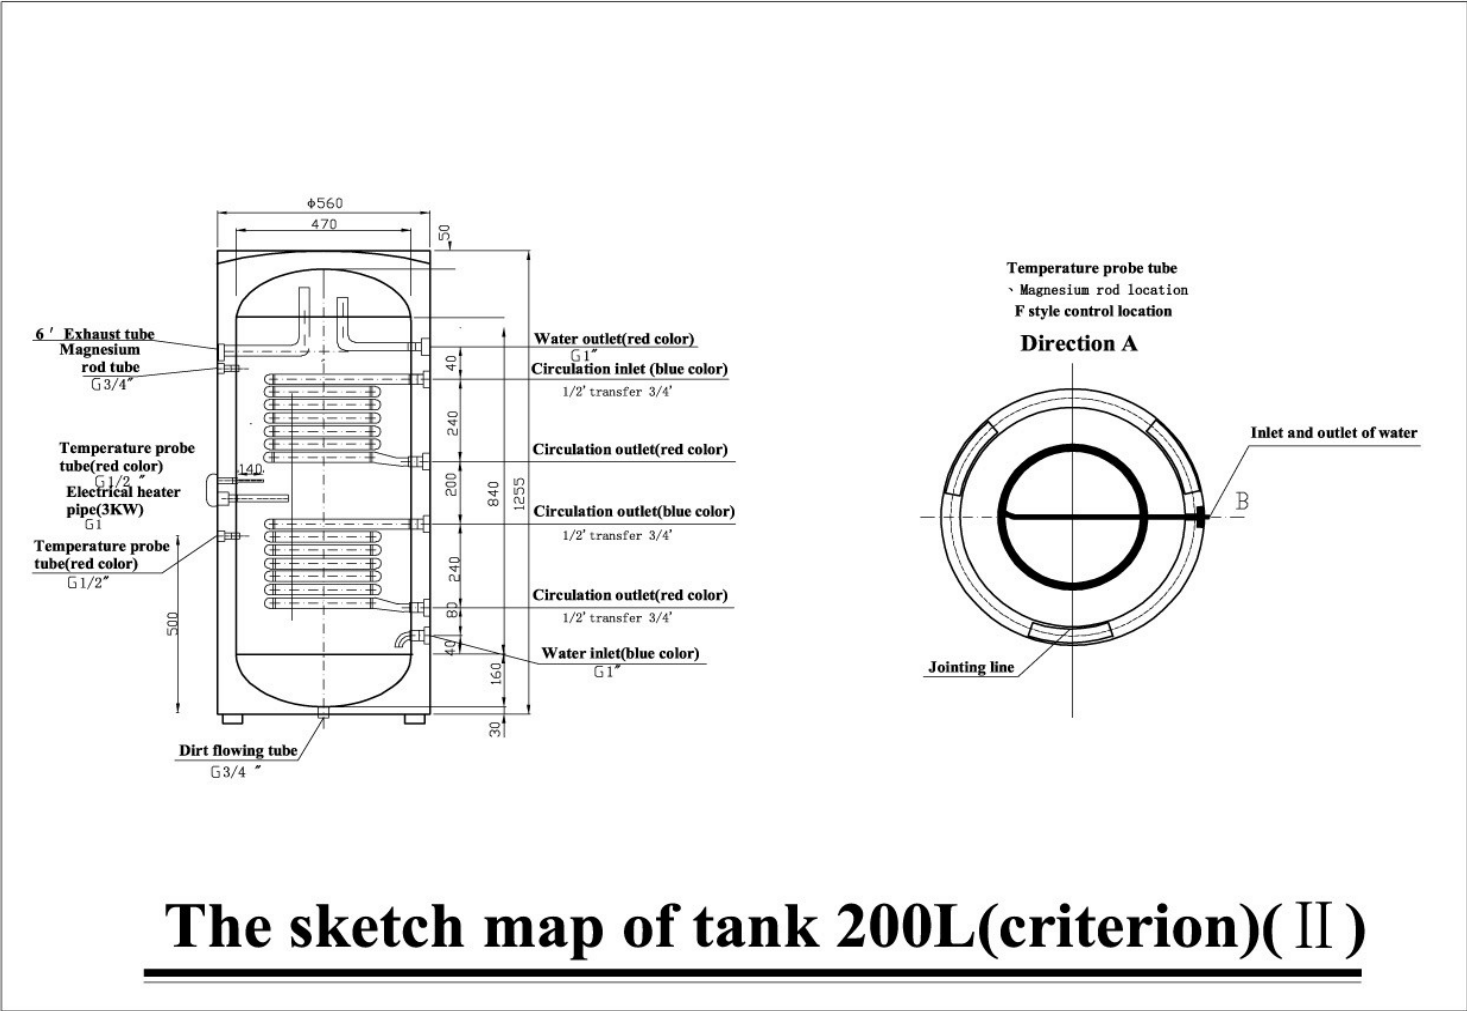

This Drawing is for 200L's tank with two coils, for other types, the structure is the same



**Copper coil in the water tank**



**Solar pressurized water tank**



SOLAR WATER HEATER

Ag.: Asrep International

Tel.: +39 333 6137934

Fax:

Contact: Beniamino Bendinelli

MSN:

Website: [www.asrepi.com](http://www.asrepi.com)

E-Mail: [sales@asrepi.com](mailto:sales@asrepi.com)

MP: 0039 333 6137934

Skype: